


What moves you? The thrill of off-road adventure? The adrenaline rush of competition? On the road, on the trail, or on the racetrack, you can count on Kenda quality. Our products are engineered for maximum performance and value across a wide range of interests and applications.



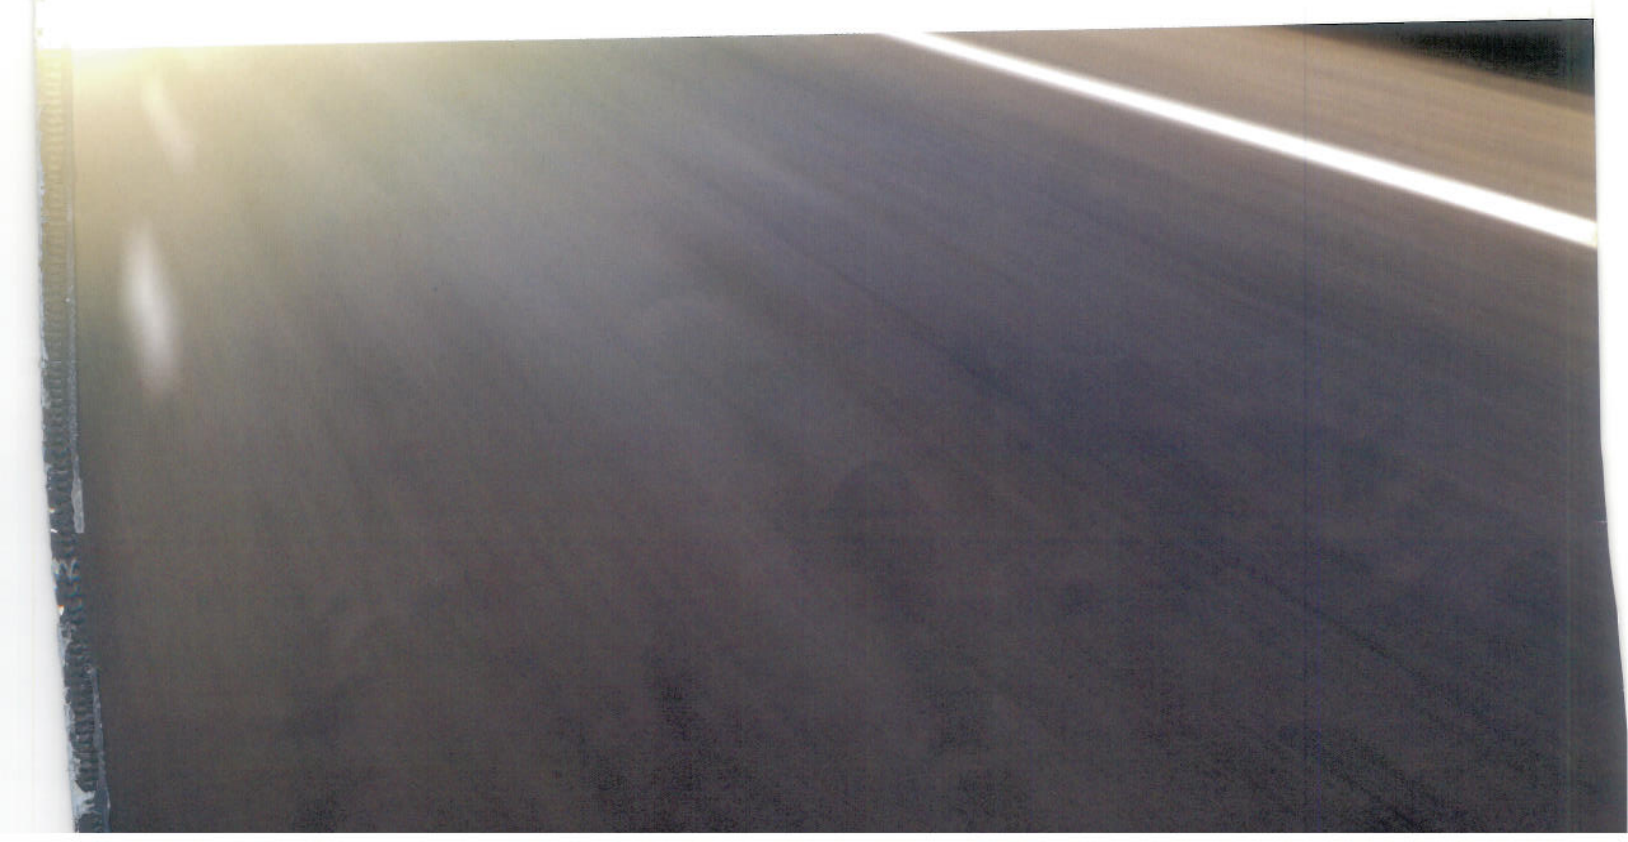

Kenda Corporate Headquarters

Kenda is a name people trust for tires; From wheels on a baby stroller to tires on a truck, Kenda will be there for your tire needs.

Since 1962, Kenda has been offering high-quality rubber products for cars and light trucks, bicycles, motorcycles, ATVs, trailers, karts, golf car, lawn and garden, wheel chairs, and skid loader/agricultural vehicles. Operating in Asia, North America, and Europe, Kenda distributes its products in over 150 countries and employs more than 10,000 people. In 2012, Kenda was named the world's 29th largest tire manufacturer.

All seven of our factories have acquired ISO 9001 certification; even so, Kenda has continually upgraded its manufacturing equipment in order to improve production efficiency so we may offer the most cost competitive products and pass the savings onto our consumer. At Kenda, we understand that only the best operation will yield the highest efficiencies and keep us in the forefront of today's competitive market.



KENDA

SINCE 1962 TIRES



destination:

EXCITEMENT


Kenda radial tires are built beyond expectations using the latest technology and exceed safety standards across the board. They're designed with an advanced compound for enhanced stability and grip. All Kenda radials have been tested against the most demanding performance standards and feature an additional rim protector for an extra layer of defense.





VEZDA AST

KR26

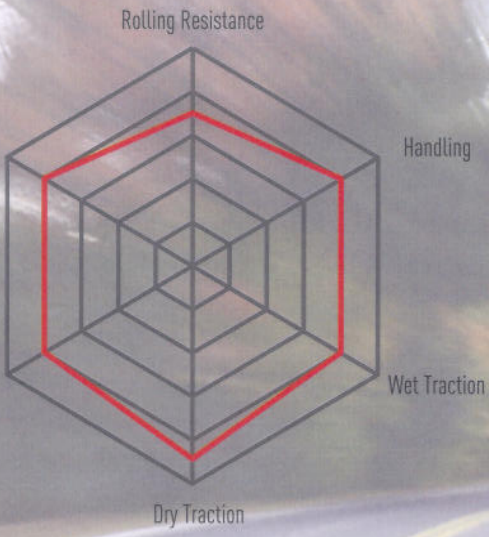


- Tread design with five-pitch sequences offers a quiet, comfortable ride.
- Four outside ribs with consistent stiffness provide handling and cornering stability.
- Inside shoulder with high void ratio design evacuates water for excellent wet performance.



台灣精品 2010
TAIWAN EXCELLENCE




KR20

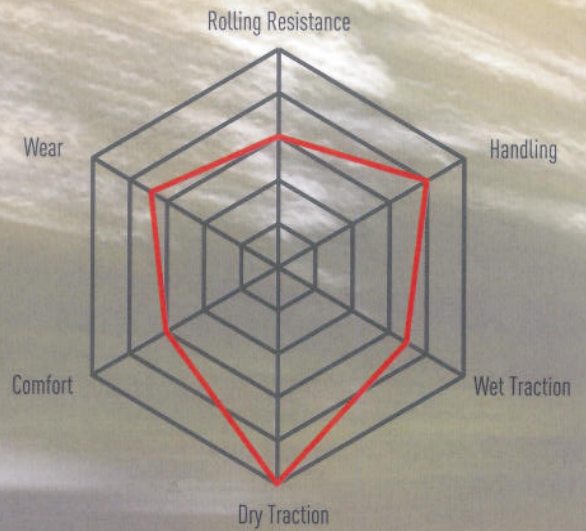

KAISER

- Advanced compound offers stability and grip performance.
- High-density endless nylon cap plies increase high-speed carcass integrity and enhances uniformity.
- Additional rim protector for extra layer of defense.
- Extensive range in V/W/Z performance categories.
- Demonstrates excellent acceleration and braking performance.



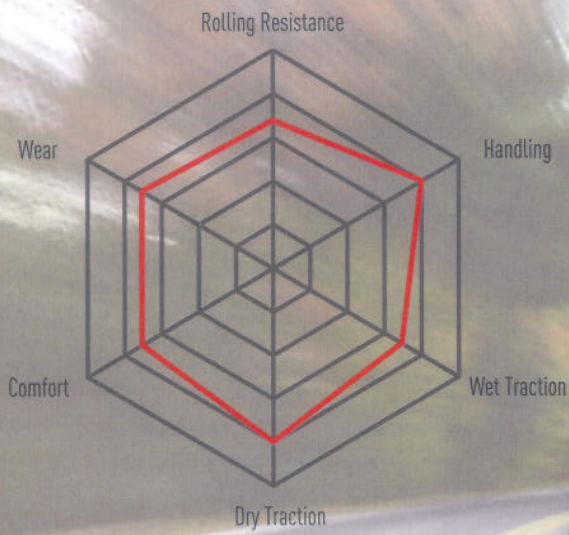

KOMET SPT-1

KR10


- Spiral jointless nylon cap-ply enhances tire uniformity and durability.
- Rim protector to protect rims from accidental curb damage.
- Optimize pattern provides extreme low noise and comfort driving.
- Center-rib tread design enhances high-speed handling stability.





KR09

KOMET SPT-2

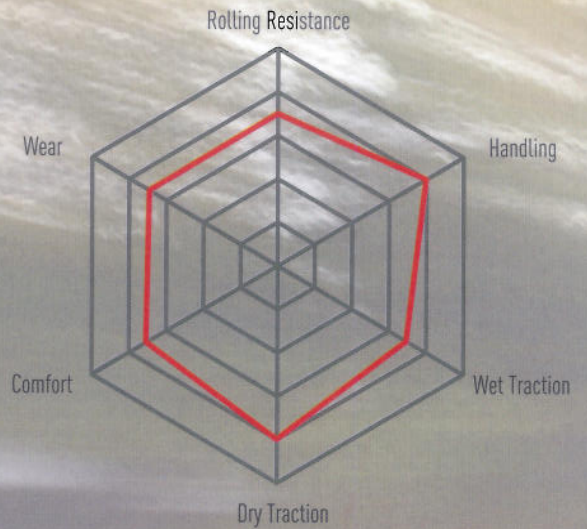

- Spiral jointless nylon cap-ply enhances tire uniformity and durability.
- Rim protector to protect rims from accidental curb damage.
- Optimize pattern provides extreme low noise and comfort driving.
- Center-rib tread design enhances high-speed handling stability.
- Uni-Directional tire.






destination:

WEEKEND

Kenda Touring Tires are designed with an all-season tread compound allowing for excellent winter weather performance without compromising mileage. They reduce noise for a quieter ride and are designed with a focus on uniformity to make sure your drive is as safe and comfortable as possible.



KR32

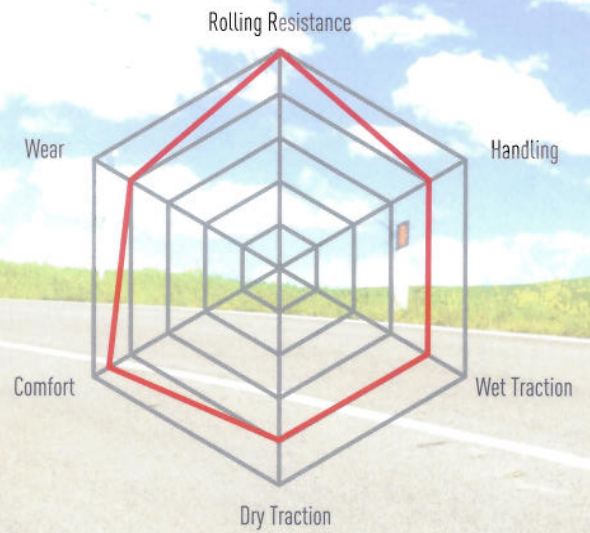

KUAVELA SL

- Improved rubber compounds that are free of High Aromatic Oils greatly reduces rolling resistance and delivers improved fuel economy.
- A Five-pitch tread sequences designed with Kenda NMA technology effectively reduces pattern noise for an incredibly quiet ride.
- Wider shoulder siping and circumferential grooves help to displace water for ultimate traction in wet or dry conditions.



HIGH PERFORMANCE



DRY TRACTION PERFORMANCE



WET TRACTION PERFORMANCE



LOW NOISE



FUEL EFFICIENT



TREAD WEAR



ALL SEASON




AWARD WINNING DESIGN



RIDE COMFORT



ECO

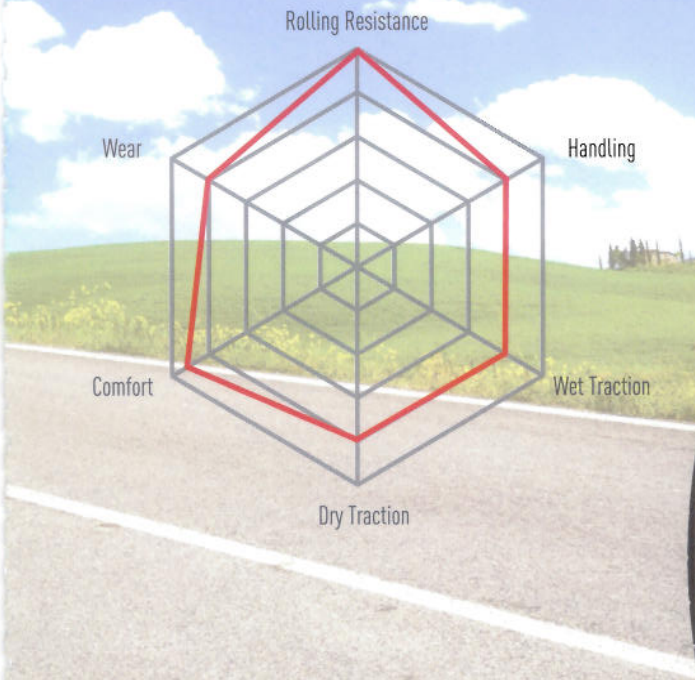

VEZDA ECO


KR30

- New Silica infused tread compound reduces rolling resistance.
- Optimized footprint and profile for an ultra quiet ride.
- Wide circumference grooves help evacuate water during inclement weather conditions.
- **Made in Taiwan.**

 **台灣精品 2013
TAIWAN EXCELLENCE**



KR23

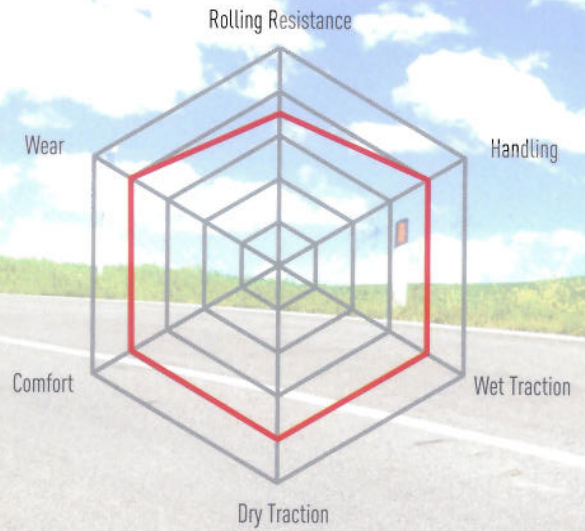

KOMET PLUS

- All-season tread compound – Superb winter performance without compromising long mileage.
- Reliable traction in all weather conditions with maximized wet handling.
- Reduces noise for a quiet ride.
- Uniformity and a smooth comfortable ride.
- Available in 13"-15" sizes.



DRY/TRACTION PERFORMANCE



WET/TRACTION PERFORMANCE



LOW NOISE



TREAD WEAR



ALL SEASON




AWARD WINNING DESIGN



RIDE COMFORT



台灣精品 2009
TAIWAN EXCELLENCE

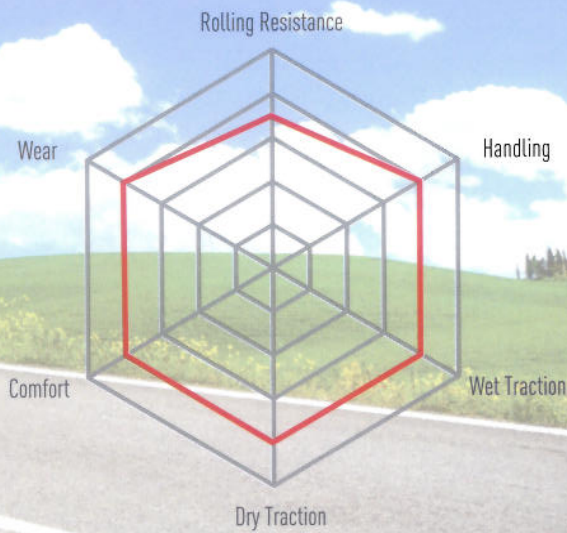

KOMET PLUS


KR23A

- All-season tread compound – Superb winter performance without compromising long mileage.
- Reliable traction in all weather conditions with maximized wet handling.
- Reduces noise for a quiet ride.
- Uniformity and a smooth comfortable ride.
- Available in 15" sizes.





KR17

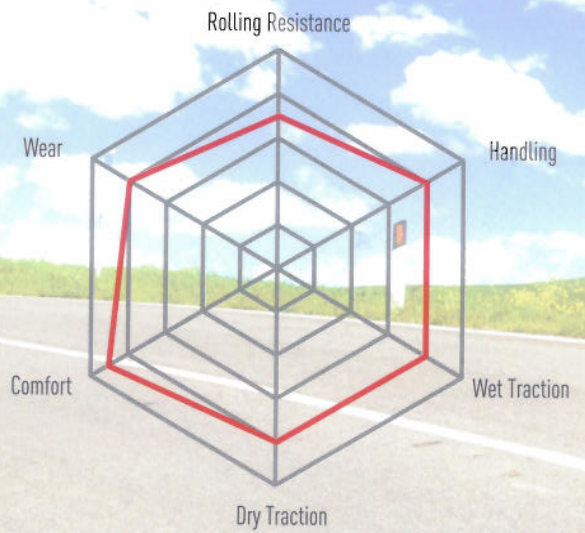

KENETICA

- Random variable pitch tread arrangement significantly reduces noise.
- High modulus low shrinkage carcass enhances driving comfort.
- Excellent grip.
- Expanded 16" and 17" sizes.
- **Made in Taiwan.**



DRY/TRACTION
PERFORMANCE



WET/TRACTION
PERFORMANCE




ALL
SEASON



TREAD WEAR



RIDE
COMFORT

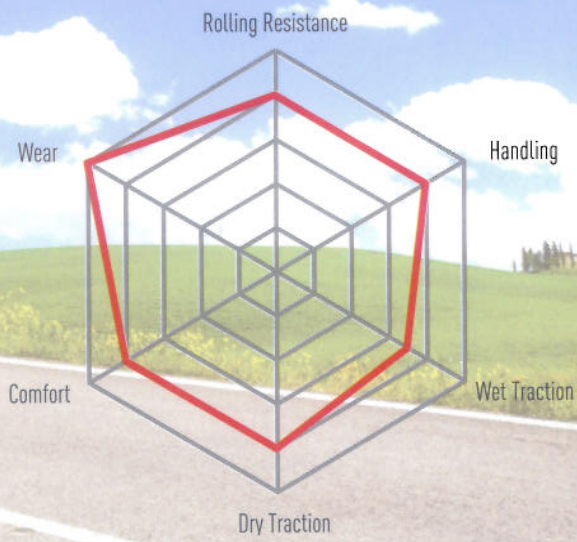

CAB KING

KR11

- New formulated computer aided design provides low noise and stability performance.
- Wide shoulders with center grooves add superior handling and water dispersion.
- A special tread compound for long-lasting tread wear and excellent traction.



destination:

DOWNHILL

When the weather isn't cooperative, Kenda is. Our engineers have worked to develop a twin tread structure to provide maximum performance at high-speeds with enhanced handling and grip. The zigzag design offers the best traction for snow and ice, so you can ride through the winter season with confidence.





KLEVER W/T

KR37

- Extra wide channel grooves helps to disperse water and snow in order to create a predictable ride.
- Winter terrain tread pattern design offers safe and comfort driving experience in winter conditions.
- Twin structure provides superior high speed performance.





KR27

ICETEC

- New silica ultra soft compound for ultimate ice traction.
- Radiated tread design for efficient water clearance.
- Ultra Zag sipes offer maximum snow/ice grip.

Due to the ultra soft compound, the IceTech tire is only available in locations with extreme winter conditions



DRY/TRACTION
PERFORMANCE



WET/TRACTION
PERFORMANCE



SNOW



SNOW TIRE

KR19


- Twin structure provides superior high speed performance.
- The drainage grooves increase water clearance efficiency.
- Special silica compound enhances handling.
- Zig-zag sipes provide better traction and outstanding grip on snowy and icy roads.




destination:

ADVENTURE

Kenda's SUV and light truck tires are engineered beyond the ordinary to handle aggressive driving challenges. They feature a straight tread pattern to help you maintain stability while behind the wheel and wider grooves to enhance traction and performance, so you can secure your place on or off road.

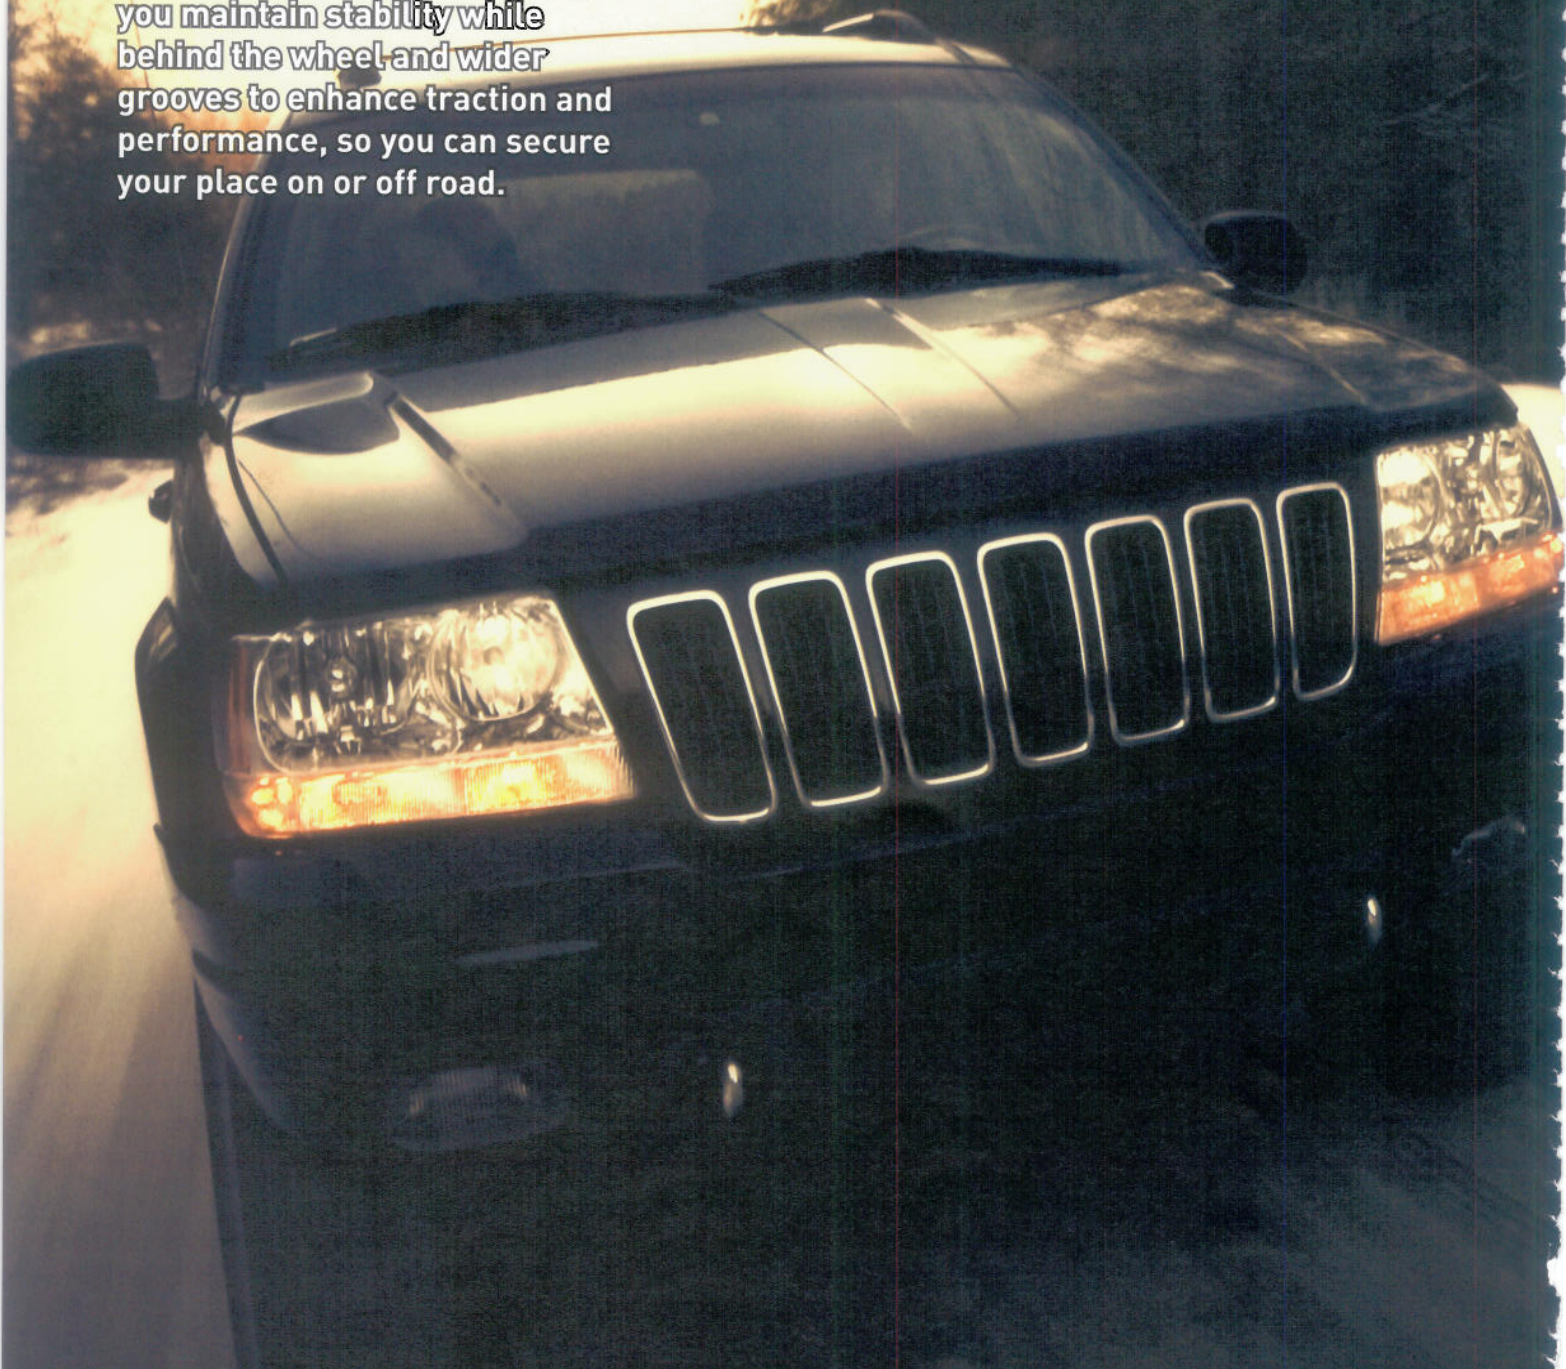

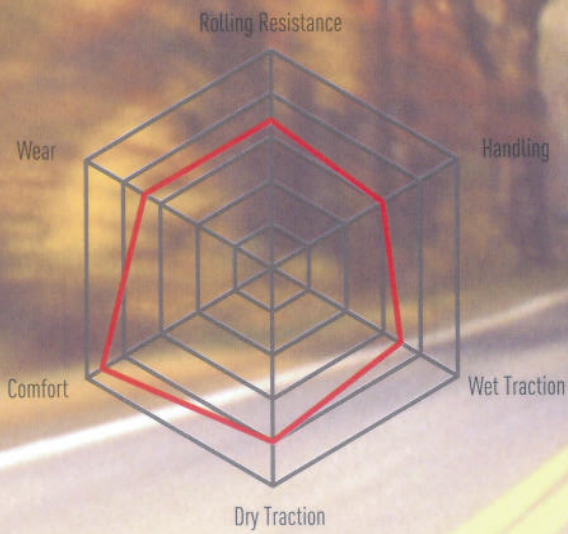

KLEVER H/P

KR15

- Sipes to enhance noise reduction and wear uniformity.
- Improved ride comfort and reduced road noise.
- Maintains high speed capability.
- Responsive handling and all season traction.





KR05

KLEVER A/P

- Revamped tire construction in order to improve ride comfort.
- One-ply nylon strap.
- Two-ply tire cord fabric.
- Reinforced fabric is added to the sidewall to help resist puncturing while providing a stiffer, more durable tire.



DRY/TRACTION
PERFORMANCE



WET/TRACTION
PERFORMANCE



ALL
SEASON



TREAD WEAR



OFF ROAD

KLEVER A/T

KR28

- Double steel-belted construction is utilized for long-lasting wear and uniformity
- An additional layer of protective rubber is added to the Klever A/T to improve tire pressure stability and air retention.
- Reinforced fabric is added to the sidewall to help resist puncturing while providing a stiffer, more durable tire.



台灣精品 2011
TAIWAN EXCELLENCE



KR29

KLEVER M/T

- Jointless spiral-wrapped nylon cap for added strength
- Double steel belted construction for long-lasting wear and uniformity
- Radiated shoulder lugs provide exceptional self-cleaning capability
- Two and Three ply sidewall construction in select sizes



台灣精品 2012
TAIWAN EXCELLENCE



GLOBE TROTTER



KR22

- Square shoulder design with wide grooves enhances road contact performance and traction.
- Straight pattern arrangement maintains stability in straight-line driving.



DRY/TRACTION
PERFORMANCE



WET/TRACTION
PERFORMANCE



ALL
SEASON



AWARD
WINNING DESIGN



OFF ROAD



KR33

KOMENDO

- Designed for light trucks and small commercial vehicles with the ability to support heavier loads.
- Optimized tread design coupled with an endurance compound for optimal performance and superior wear.
- Continuous shoulder ribs provide smooth ride and increased tread life.



DRY/TRACTION
PERFORMANCE



ALL
SEASON



TREAD WEAR



CARGO



KOMENDO

KR33A

- Designed for light trucks and small commercial vehicles with the ability to support heavier loads.
- Optimized tread design coupled with an endurance compound for optimal performance and superior wear.
- Continuous shoulder ribs provide smooth ride and increased tread life.
- Available in 205mm section width and over.





KR06

KOYOTE

- Reinforced steel belted construction for heavy duty application.
- High performance inner-liner for durability.
- Superior tread compound for long wear life.



DRY/TRACTION
PERFORMANCE



ALL
SEASON



TREAD WEAR



CARGO

POWER MASTER



KR12

- Five-rib tread design with four grooves offer an even tread wear to prolong tire life.
- Low rolling resistance for greater economy.
- Excellent total road contact performance.



DRY/TRACTION
PERFORMANCE



TREAD WEAR



CARGO



destination:

CARGO

At Kenda, we know you need a confident safety assurance to reach your destination efficiently. The innovative design mold for Kenda truck tires improves tread durability and maximizes traction control, so you can ride safer and further.



KARRIER

H/P

KR18

- Tread straight pattern design offers excellent safety, comfort and stability.
- The structural design provides superior load capacity and long mileage.





KR16

KARGO

- The cross-cut siping improves wet handling, steering and tracking stability.
- Two steel belts offers rugged puncture resistance and durability.
- Reinforced tread on the inside shoulder provides long and even wear.





KARRIER

KR03

- Double steel belts with full nylon plies for heavy-duty application and increased tire life.
- New tread rubber compound offers great traction in dry conditions.
- Providing additional stability at higher speed.





K363

- All patterns are connected with arch, the design reduces concentrated stress and increases tear resistance of pattern
- Bigger block pattern improves wear resistance
- New shoulder design and artistic sidewall improves heat dispersion on shoulder and creates an attractive appearance
- The design of reinforced casing and bead increases the loading capacity
- Unique tread compound design improves wear resistance



K370

- Long, even tread wear
- Improved handling and stability in steer, drive, trailer applications
- Design with four grooves
- Premium off-highway tire for logging cement and construction operations



K391M

- Aggressive tread design provides great grips and controls
- Four-straight grooves enhance driving stability



K392

- Better fuel economy, easier maintenance
- High-strength belt construction for additional toughness



K393

- Special sidewall design and heavy duty construction
- High strength, flex/ fatigue-resistant ply improves casing life
- Five-rib tread pattern promotes element stability and low rolling resistance
- Four grooves disperse water better
- Recommended for front tire use



K394

- Casing design provides superior comfort
- High-strength carcass construction for additional toughness
- Better fuel economy, easier maintenance
- Recommended for rear tire use



K396

- Alternating shoulder lug scallops increase lateral grip and stability
- Wide, open-shoulder design provides exceptional self-cleaning capability
- Ultra-high ply turn-up enhances stable responsive handling and increases sidewall durability



K630

- Five-rib treads design with four grooves for outstanding traction and handling
- Four wide circumferential grooves pump water away
- Casing compound and latest bead design extends casing life



K631

- Computerized tread design helps to make K631 a great tire
- Computer modular design which utilizes natural shapes to improve tread wear and durability
- Deep circumferential grooves help disperse water increasing handling and performance

SPECIFICATIONS

KR26

SERIES	SIZE		S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
45	225/45ZR17 94W	XL	226	635	1477	670	44	7.5	8.1
	235/45ZR17 97W	XL	235	645	1609	730	51	8.0	8.1
50	205/50ZR17 93W	XL	214	637	1433	650	51	6.5	8.1
	215/50ZR17 95W	XL	223	648	1521	690	51	7.0	8.1
	225/50ZR17 94W		228	658	1477	670	44	7.0	8.1
55	205/55ZR16 91W		212	632	1356	615	44	6.5	8.1
	205/55R16 91V		212	632	1356	615	44	6.5	8.1
	205/55R16 91W		212	632	1356	615	44	6.5	8.1
	205/55ZR16 94W	XL	212	632	1477	670	51	6.5	8.1
	215/55ZR16 97W	XL	224	642	1609	730	51	7.0	8.1
	215/55ZR17 93W		224	668	1477	679	44	7.0	8.1
	225/55ZR17 101W	XL	230	680	1819	825	51	7.0	8.1
	60	195/60R15 88V		201	615	1235	560	44	6.0
65	195/65R15 91V		200	635	1356	615	44	6.0	8.1

KR20

SERIES	SIZE		S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
30	265/30ZR19 93W	XL	266	645	1433	650	51	9.5	8.2
	275/30ZR19 92W		278	649	1389	630	44	9.5	8.2
35	255/35ZR18 94W	XL	260	635	1477	670	51	9	8.2
	265/35ZR18 93W	XL	271	643	1609	730	51	9.5	8.2
	215/35ZR19 85W	XL	215	633	1135	515	51	7.5	8.2
	225/35ZR19 88W	XL	228	643	1235	560	51	8	8.2
	235/35ZR19 91W	XL	243	650	1356	615	51	8.5	8.2
	245/35ZR19 93W	XL	248	655	1433	650	51	8.5	8.2
	245/35ZR20 95W	XL	248	681	1521	690	51	8.5	8.2
	255/35ZR20 97W	XL	260	687	1609	730	51	9	8.2
	205/40ZR17 84W	XL	212	596	1102	500	51	7.5	8.2
40	205/40R17 84H	XL	212	596	1102	500	51	7.5	8.2
	215/40R17 83H		218	604	1074	487	44	7.5	8.1
	215/40ZR17 83W		218	604	1074	487	44	7.5	8.1
	245/40R17 91H		248	629	1356	615	44	8.5	8.2
	245/40ZR17 91W		249	629	1356	615	44	8.5	8.2
	225/40ZR18 88W		226	635	1235	560	44	8	8.1
	225/40ZR18 92W	XL	226	635	1389	630	51	8	8.1
	225/40R18 92H	XL	226	635	1389	630	51	8	8.1
	235/40ZR18 91W		241	645	1356	615	44	8.5	8.2
	235/40ZR18 95W	XL	241	645	1521	690	51	8.5	8.2
	245/40ZR18 93W		249	653	1433	650	44	8.5	8.2
	245/40ZR18 97W	XL	249	653	1609	730	51	8.5	8.2

KR20 (Continued)

SERIES	SIZE		S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
45	195/45R15 78V		195	557	937	425	44	6.5	8.1
	195/45R16 84V	XL	195	582	1102	500	51	6.5	8.1
	205/45ZR16 87W	XL	206	590	1201	545	51	7	8.1
	205/45ZR17 88W	XL	204	617	1235	560	51	7	8.1
	215/45ZR17 87W		212	626	1201	545	44	7	8.1
	215/45ZR17 91W	XL	212	626	1356	615	51	7	8.1
	215/45R17 91H	XL	212	626	1356	615	51	7	8.1
	225/45ZR17 91W		226	635	1356	615	44	7.5	8.1
	225/45ZR17 94W	XL	226	635	1477	670	51	7.5	8.1
	225/45R17 94H	XL	226	635	1477	670	51	7.5	8.1
	235/45ZR17 94W		238	645	1477	670	44	8	8.2
	235/45R17 94H		238	645	1477	670	44	8	8.2
	245/45ZR17 95W		245	652	1521	690	44	8	8.2
	225/45ZR18 91W		225	659	1356	615	44	7.5	8.1
	245/45ZR18 96W		245	678	1565	710	44	8	8.2
50	195/50R15 82V		198	578	1047	475	44	6	8.1
	205/50R16 87V		210	615	1201	545	44	6.5	8.1
	205/50ZR16 87W		210	615	1201	545	44	6.5	8.1
	205/50R16 91V	XL	210	615	1356	615	44	6.5	8.1
	205/50ZR17 93W	XL	210	637	1433	650	51	6.5	8.1
	215/50R17 91V		223	648	1356	615	44	7	8.1
	225/50ZR17 98W	XL	232	658	1653	750	51	7	8.2
55	185/55R15 82H		194	587	1047	475	44	6	8.1
	185/55R15 82V		194	587	1047	475	44	6	8.1
	195/55R15 85V		198	596	1135	515	44	6	8.1
	195/55R16 87V		198	620	1201	545	44	6	8.1
	205/55R16 91V		214	632	1356	615	44	6.5	8.1
	205/55ZR16 94W	XL	214	632	1477	670	51	6.5	8.1
	215/55ZR16 97W	XL	224	643	1609	730	51	7	8.1
	225/55ZR16 95W		232	654	1521	690	44	7	8.2
	215/55R17 94V		223	668	1477	670	44	7	8.1
	235/55ZR17 99W		245	690	1653	750	44	7	8.2
60	175/60R13 77H		175	540	908	412	44	5	8.2
	185/60R13 80H		186	553	992	450	44	5.5	8.2
	185/60R14 82H		189	578	1047	475	44	5.5	8.2
	195/60R14 86H		201	590	1168	530	44	6	8.1
	205/60R14 88V		206	602	1235	560	44	6	8.1



SERIES	SIZE		S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	
45	235/45R17 95V		236	644	1521	690	44	8.0	8.1	
50	205/50R16 87V		210	613	1201	545	44	6.5	8.1	
	225/50R16 92V		228	632	1389	630	44	7.0	8.2	
55	195/55R15 85H		198	596	1135	515	44	6.0	8.1	
	195/55R15 85V		198	596	1135	515	44	6.0	8.1	
	195/55R15 85W		198	596	1135	515	44	6.0	8.1	
	205/55R15 88V		210	608	1235	560	44	6.5	8.1	
	205/55R16 91V		210	632	1356	615	44	6.5	8.1	
	205/55R16 94W	XL	210	632	1477	670	51	6.5	8.1	
	215/55R16 93V		226	642	1433	650	44	7.0	8.1	
	225/55R16 95V		231	654	1521	690	44	7.0	8.2	
	215/55R17 98V	XL	223	668	1653	750	51	7.0	8.1	
	225/55R17 98V		231	680	1653	750	44	7.0	8.1	
	225/55R17 101V	XL	231	680	1819	825	51	7.0	8.1	
	60	185/60R14 82H		186	578	1047	475	44	5.5	8.3
		195/60R14 86H		200	590	1681	530	44	6.0	8.3
185/60R15 84H			186	604	1102	500	44	5.5	8.3	
195/60R15 88V			200	615	1235	560	44	6.0	8.3	
195/60R15 88H			200	615	1235	560	44	6.0	8.3	
205/60R15 91H			206	627	1356	615	44	6.0	8.3	
205/60R15 91V			206	627	1356	615	44	6.0	8.3	
205/60R16 92H			206	655	1356	615	44	6.0	8.3	
205/60R16 92V			206	655	1356	615	44	6.0	8.3	
215/60R16 95H			220	664	1521	690	44	6.5	8.2	
215/60R16 95V			220	664	1521	690	44	6.5	8.2	
225/60R16 98H			228	677	1653	750	44	6.5	8.7	
225/60R16 98V			228	677	1653	750	44	6.5	8.7	
65		185/65R14 86H		188	596	1168	530	44	5.5	8.2
	195/65R14 89H		202	610	1279	580	44	6.0	8.4	
	195/65R15 91H		202	636	1356	615	44	6.0	8.4	
	195/65R15 91V		202	636	1356	615	44	6.0	8.4	
	205/65R15 94H		208	648	1477	670	44	6.0	8.4	
	205/65R15 94V		208	648	1477	670	44	6.0	8.4	

KR09

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
50	195/50R15 82V	201	578	1047	475	44	6.0	8.1
	205/50R15 86V	212	587	1168	530	44	6.5	8.1
55	195/55R15 85V	198	596	1135	515	44	6.0	8.1

KR32

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
40	225/40ZR18 XL TL 92W	230	637	1389	630	50	8	7.7
	235/40ZR18 XL TL 95W	241	645	1521	690	50	8.5	7.7
	245/40ZR18 TL 93W	248	653	1433	650	44	8.5	7.7
	245/40ZR18 XL TL 97V	248	653	1609	730	50	8.5	7.7
45	205/45ZR16 XL TL 87W	206	590	1201	545	50	7	7.7
	205/45R17 XL TL 88V	206	616	1235	560	50	7	7.7
	215/45R17 XL TL 91V	213	626	1356	615	42	7	7.7
	215/45ZR17 XL TL 91V	213	626	1356	615	50	7	7.7
	215/45ZR17 TL 91W	213	626	1356	615	50	7	7.7
	225/45ZR17 XL TL 94W	225	634	1477	670	50	7.5	7.7
	235/45ZR17 TL 94W	236	644	1609	730	50	8	7.7
	245/45ZR18 TL 96V	243	677	1764	800	44	8	7.7
	245/45ZR18 TL 96W	243	677	1565	710	44	8	7.7
	50	195/50R16 TL 88V	201	602	1235	560	50	6
205/50R16 TL 87V		214	612	1201	545	44	6.5	7.7
205/50R17 TL 89V		214	638	1279	580	44	6.5	7.7
225/50R17 TL 94V		233	658	1477	670	44	7	7.7
245/50ZR18 TL 100W		253	703	1764	800	44	7.5	7.7
55	185/55R14 TL 80H	194	560	992	450	44	6	7.7
	185/55R15 TL 82V	194	585	1047	475	44	6	7.7
	185/55R16 TL 83H	194	610	1074	487	44	6	7.7
	195/55R15 TL 85V	201	595	1135	515	44	6	7.7
	195/55R16 XL TL 91V	201	620	1356	615	50	6	7.7
	205/55R16 TL 91V	214	632	1356	615	44	6.5	7.7
	215/55R16 TL 97V	226	642	1609	730	50	7	7.7
	215/55R17 TL 94V	226	668	1477	670	44	7	7.7
	225/55R16 99V	233	654	1709	775	50	7	7.7
	225/55R17 TL 101V	233	680	1819	825	44	7	7.7
60	235/55ZR17 TL 103V	245	690	1929	875	50	7.5	7.7
	235/55ZR17 TL 103W	245	690	1929	875	50	7.5	7.7
	185/60R15 TL 84H	189	603	1102	500	44	5.5	7.7
	195/60R15 TL 88H	201	615	1235	560	44	6	7.7
	195/60R16 TL 89H	201	640	1279	580	44	6	7.7
	205/60R15 TL 91V	209	627	1356	615	44	6	7.7
	205/60R16 XL TL 96H	209	652	1389	630	44	6	7.7
	215/60R16 TL 95H	221	664	1521	690	44	6.5	7.7
	215/60R17 TL 96H	221	690	1565	710	44	6.5	7.7
	225/60R16 TL 98H	228	676	1653	750	44	6.5	7.7
65	225/60R17 TL 99H	228	702	1709	775	44	6.5	7.7
	175/65R15 TL 84H	177	609	1102	500	44	5	7.7
	185/65R15 TL 88H	189	621	1235	560	44	5.5	7.7
	195/65R15 TL 91H	201	635	1356	615	44	6	7.7
	205/65R15 TL 94H	209	647	1477	670	44	6	7.7
	215/65R16 TL 98H	221	661	1653	750	44	6.5	7.7
	225/65R17 TL 102H	228	724	1874	850	44	6.5	7.7

KR30

SERIES	SIZE			S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN
40	245/40R18	97V	XL	248	653	1609	730	50	8.5	7.5	*
45	205/45R17	88V	XL	206	616	1235	560	50	7.0	7.5	*
	215/45R17	91V	XL	213	626	1356	615	50	7.0	7.5	*
	225/45R17	94V	XL	225	635	1477	670	50	7.5	7.5	*
	235/45R17	94V		234	644	1477	670	44	8.0	7.5	*
	245/45R17	95V		248	652	1521	690	44	8.0	7.5	*
	255/45R19	100V		255	713	1764	800	44	8.5	7.5	*
50	195/50R15	82H		200	577	1047	475	44	6.0	7.5	*
	195/50R16	84H		201	602	1102	500	44	6.0	7.5	*
	225/50R16	92V		233	632	1389	630	44	6.0	7.5	*
	205/50R17	89H		214	638	1279	580	44	6.5	7.5	*
	215/50R17	95V	XL	223	648	1521	690	50	7.0	7.5	*
	225/50R17	94V		228	658	1477	670	44	6.0	7.5	*
55	195/55R15	85V		197	593	1135	515	44	6.0	7.5	*
	195/55R16	87V		197	620	1201	545	44	6.0	7.5	*
	205/55R16	91V		210	632	1356	615	44	6.5	7.5	*
	215/55R17	94V		225	669	1477	670	44	7.0	7.5	*
	275/55R20	117V	XL	284	810	2833	1285	44	8.5	7.5	*
60	195/60R15	88H		201	615	1235	560	44	6.0	7.5	*
	215/60R16	95H		218	664	1521	690	44	6.5	7.5	*
	225/60R16	98H		225	676	1653	750	44	6.5	7.5	*
65	195/65R15	91V		201	635	1356	615	44	6.0	7.5	*
	195/65R15	91H		201	635	1356	615	44	6.0	7.5	*
	205/65R15	94H		209	649	1477	670	44	6.0	7.5	*
	205/65R16	95H		209	672	1521	690	44	6.0	7.5	*
	215/65R16	98H		218	686	1653	750	44	6.0	7.5	*
	225/65R17	102V		228	724	1874	850	44	6.5	7.5	*
	225/65R17	102H		228	724	1874	850	44	6.5	7.5	*
	245/65R17	107H		248	750	2149	975	44	7.0	7.5	*
	275/65R18	116H		279	815	2756	1250	44	8.0	7.5	*

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN
50	195/50R15 82H	198	580	1047	475	44	6	8.1	*
	155/55R14 69V	162	528	716	325	44	5	7.5	
55	185/55R14 80H	194	562	992	450	44	6	8	
	195/55R15 85H	198	596	1135	515	44	6	8.1	
	195/55R15 85V	198	596	1135	515	44	6	8.1	*
	185/55R16 87M	182	610	1201	545	50	5	5.4	
	205/55R16 91V	214	632	1356	615	44	6.5	8	
	175/60R13 77H	177	540	908	412	44	5	7.5	
60	165/60R14 75H	168	554	853	387	44	5	7.2	
	185/60R14 82H	186	581	1047	475	44	5.5	8.3	*
	195/60R14 86H	200	592	1168	530	44	6	8.3	*
	185/60R15 84H	188	606	1102	500	44	5.5	8.3	
	195/60R15 88H	201	615	1235	560	44	6	8.3	*
	195/60R15 88V	201	615	1235	560	44	6	8.3	
	205/60R15 91H	208	627	1356	615	44	6	8.3	
	215/60R15 94H	218	639	1477	670	44	6.5	8.2	
	225/60R15 96H	226	650	1565	710	44	6.5	8.7	
	225/60R15 96V	226	650	1565	710	44	6.5	8.7	
	205/60R16 92V	206	654	1389	630	44	6	8.4	
	215/60R16 95H	218	664	1521	690	44	6.5	8.2	
225/60R16 98H	226	676	1653	750	44	6.5	8.7		
65	155/65R13 73H	155	531	805	365	44	4.5	6	
	165/65R13 77H	168	546	908	412	44	5	7.2	*
	155/65R14 75T	154	556	853	387	44	4.5	6	
	165/65R14 79H	168	572	963	437	44	5	7.2	
	175/65R14 82H	177	586	1047	475	44	5	7.5	
	175/65R14 82T	177	586	1047	475	44	5	7.5	
	185/65R14 86H	187	598	1168	530	44	5.5	8.2	*
	195/65R14 89H	199	612	1279	580	44	6	8.3	*
	175/65R15 84H	177	609	1102	500	44	5	7.5	
	185/65R15 88H	189	621	1235	560	44	5.5	8.2	
	195/65R15 91H	199	638	1356	615	44	6	8.3	*
	195/65R15 91V	199	638	1356	615	44	6	8.3	
	205/65R15 94H	206	649	1477	670	44	6	8.2	
	215/65R15 96H	218	660	1565	710	44	6.5	8.2	
	205/65R16 95H	206	672	1433	650	44	6	8.2	
	215/65R16 98H	221	686	1653	750	44	6.5	8.4	
215/65R16 98V	221	686	1653	750	44	6.5	8.4		
70	155/70R12 RWL 73S	157	523	805	365	44	4.5	7.3	
	165/70R12 RWL 77S	170	539	908	412	44	5	7.2	
	155/70R13 75T	154	548	853	387	44	4.5	7.2	
	165/70R13 79T	170	562	963	437	44	5	7.2	*
	175/70R13 82H	176	576	1047	475	44	5	7.5	*
	175/70R13 WSW 82T	176	576	1047	475	44	5	7.5	
	185/70R13 86H	188	592	1168	530	44	5.5	8.2	*
	165/70R14 81T	170	587	1019	462	44	5	7.2	
	175/70R14 84H	176	603	1102	500	44	5	7.5	
	185/70R14 88H	188	618	1235	560	44	5.5	8.2	
	195/70R14 91H	198	630	1356	615	44	6	8.2	
	205/70R14 95H	210	645	1521	690	44	6	8.5	
	205/70R15 96H	210	670	1565	710	44	6	8.5	
	215/70R15 98H	220	685	1653	750	44	6.5	8.5	
80	145/80R13 75S	145	562	853	387	44	4	7.3	
	155/80R13 79T	154	578	963	437	44	4.5	7.2	
	175/80R13 82T	176	576	1047	475	44	5	7.5	

KR23A

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN
50	165/50R15 73V	170	214	805	365	44	5.0	7.3	
	165/55R14 72V	170	538	783	355	44	5.0	7.3	
55	165/55R15 75V	170	563	853	387	44	5.0	7.3	
	205/55R16 91V	214	632	1356	615	44	6.5	8.1	*
60	205/60R15 91H	206	628	1356	615	44	6.0	8.3	*
	225/60R15 96H	226	650	1565	710	44	6.5	8.7	
	205/60R16 92H	206	652	1389	630	44	6.0	8.3	
	205/60R16 92V	206	652	1389	630	44	6.0	8.3	
	215/60R16 95H	218	664	1521	690	44	6.5	8.2	*
	225/60R16 98H	226	676	1653	750	44	6.5	8.7	
	215/60R17 95H	224	687	1521	690	44	6.5	8.2	
	205/65R15 94H	206	649	1477	670	44	6.0	8.3	*
65	215/65R15 96H	218	660	1565	710	44	6.5	8.2	
	205/65R16 95H	206	672	1521	690	44	6.0	8.3	
	215/65R16 98H	218	686	1653	750	44	6.5	8.2	
	215/65R16 98V	218	686	1653	750	44	6.5	8.2	
70	205/70R15 96H	210	670	1565	710	44	6.0	8.5	
	215/70R15 98H	220	685	1653	750	44	6.5	8.5	

KR17

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN
45	215/45R17 87H	212	626	1201	545	44	7.0	7.9	*
	225/45R17 91H	225	634	1356	615	44	7.5	8.1	*
	225/45R18 91H	225	659	1356	615	44	7.5	8.1	*
50	205/50R16 87T	210	615	1201	545	44	6.5	8.1	*
	205/50R17 89H	210	638	1279	580	44	6.5	7.6	*
	215/50R17 91T	221	648	1356	615	44	7.0	7.9	*
	225/50R17 94T	232	658	1477	670	44	7.0	7.9	*

KR-17 (Continued)

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN	
55	205/55R16 89T	210	632	1279	580	44	6.5	8.2	*	
	215/55R17 94T	224	668	1477	670	44	7.0	8.1	*	
	225/55R17 95T	230	680	1521	690	44	7.0	8.2	*	
	235/55R17 99T	245	691	1709	775	44	7.5	8.2	*	
60	185/60R14 82H	187	581	1047	475	44	5.5	8.2	*	
	195/60R14 86H	200	593	1168	530	44	6.0	8.2	*	
	185/60R15 84T	187	605	1102	500	44	5.5	8.2	*	
	195/60R15 88H	200	619	1235	560	44	6.0	8.2	*	
	205/60R15 91H	207	633	1356	615	44	6.0	8.2	*	
	215/60R15 94H	218	645	1477	670	44	6.5	8.3	*	
	205/60R16 91T	207	654	1356	615	44	6.0	8.2	*	
	215/60R16 95T	221	659	1521	690	44	6.5	7.9	*	
	225/60R16 98T	225	670	1653	750	44	6.5	7.9	*	
	235/60R16 99T	240	688	1709	775	44	7.0	8.2	*	
	215/60R17 95T	218	695	1521	690	44	6.5	8.2	*	
	225/60R17 99T	225	701	1709	775	44	6.5	7.9	*	
65	175/65R14 82T	182	588	1047	475	44	5.0	8.2	*	
	185/65R14 86H	187	595	1168	530	44	5.5	8.2	*	
	185/65R14 86T	187	595	1168	530	44	5.5	8.2	*	
	185/65R15 86T	187	619	1168	530	44	5.5	8.2	*	
	195/65R15 91H	197	635	1356	615	44	6.0	8.2	*	
	195/65R15 91T	197	635	1356	615	44	6.0	8.2	*	
	205/65R15 94H	206	648	1477	670	44	6.0	8.2	*	
	205/65R15 94T	206	648	1477	670	44	6.0	8.2	*	
	205/65R16 94T	210	672	1477	670	44	6.0	8.2	*	
	215/65R16 98T	218	686	1653	750	44	6.5	8.2	*	
	225/65R16 100H	228	698	1764	800	44	6.5	8.2	*	
70	215/65R17 98T	217	712	1654	750	44	6.5	8.2	*	
	165/70R13 79T	172	568	963	437	44	5.0	8.2	*	
	175/70R13 82T	178	580	1047	475	44	5.0	8.2	*	
	185/70R13 86T	192	595	1168	530	44	5.5	8.2	*	
	185/70R14 88T	192	618	1235	560	44	5.5	8.2	*	
	185/70R14 88H	192	618	1235	560	44	5.5	8.2	*	
	195/70R14 91T	198	630	1356	615	44	6.0	8.2	*	
	195/70R14 91H	198	630	1356	615	44	6.0	8.2	*	
	205/70R14 95T	207	642	1521	690	44	6.0	8.2	*	
	205/70R14 95H	207	642	1521	690	44	6.0	8.2	*	
	205/70R15 96S	208	668	1565	710	44	6.0	8.2	*	
75	215/70R15 98S	219	680	1653	750	44	6.5	8.2	*	
	235/75R15 105S	242	730	2039	925	44	6.5	8.2	*	
	80	145/80R12 74T	145	537	827	375	44	4.0	8.2	*
		155/80R12 77T	156	554	908	412	44	4.5	8.2	*
155/80R13 79T		156	580	963	437	44	4.5	8.2	*	
165/80R15 87T		166	657	1201	545	44	4.5	8.2	*	

KR11

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
60	185/60R14 82H	189	578	1047	475	36	5.5	8.3
	195/60R14 86H	198	589	1168	530	36	6.0	8.3
	195/60R15 88H	198	615	1235	560	36	6.0	8.3
65	175/65R14 82H	177	584	1047	475	36	5.0	8.3
	185/65R14 86H	189	596	1168	530	36	5.5	8.3
	185/65R15 88H	189	621	1234	560	36	5.5	8.3
	195/65R15 91H	201	635	1356	615	36	6.0	8.3
	205/65R15 94H	209	647	1477	670	36	6.0	8.3
70	145/70R12 69T	148	509	716	325	36	4.5	8.1
	165/70R13 79T	172	566	963	437	36	5.0	8.2
	175/70R13 82T	178	576	1047	475	36	5.0	8.3
	185/70R13 86T	186	590	1168	530	36	5.5	8.4
	165/70R14 81T	167	591	1019	462	36	5.0	8.2

KR37

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
40	275/40R20 106Q XL	278	728	2094	950	50	9.5	10.2
45	275/45R19 108Q	273	731	2205	1000	50	9	10.2
50	255/50R19 107Q XL	265	739	2149	975	50	8	10.2
	265/50R19 110Q XL	277	749	2337	1060	50	8.5	10.2
55	235/55R18 100Q	245	715	1764	800	44	7.5	10.2
	245/55R19 103Q	253	753	1929	875	44	7.5	10.2
	255/55R18 105Q	265	737	2039	925	44	8	10.2
	255/55R19 111Q XL	265	763	2337	1060	50	8	10.2
60	235/60R16 100Q	240	688	1764	800	44	7	10.2
	235/60R18 103Q	240	739	1929	875	44	7	10.2
	285/60R18 116Q	292	799	2756	1250	44	8.5	10.2
65	245/65R17 107Q	248	750	2149	975	44	7	10.2
	265/65R17 112Q	272	776	2469	1120	44	8	10.2
	275/65R17 115Q	279	790	2679	1215	44	8	10.2
	285/65R17 116Q	292	802	2756	1250	44	8.5	10.2
70	225/70R16 103Q	228	722	1929	875	44	6.5	10.2
	235/70R16 106Q	240	736	2094	950	44	7	10.2
	245/70R16 107Q	248	750	2149	975	44	7	10.2
	225/75R15 102Q	223	719	1874	850	44	6	10.2
	235/75R15 105Q	235	733	2039	925	44	6.5	10.2

KR27

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
50	205/50R16 87Q	214	612	1201	545	44	6.5	9.2
	225/50R17 94H	231	658	1477	670	44	7.0	9.2
55	205/55R16 91T	214	635	1356	615	44	6.5	9.2
	215/55R17 94H	221	670	1477	670	44	7.0	9.2
	225/55R17 97H	231	683	1609	730	44	7.0	9.2
60	165/60R14 75T	168	554	853	387	44	5.0	8.2
	195/60R15 88T	201	615	1235	560	44	6.0	9.2
	205/60R16 92T	207	654	1389	630	44	6.0	9.2
	225/60R17 99T	228	702	1709	775	44	6.5	9.2

KR27 (Continued)

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
65	175/65R14 82T	177	584	1047	475	44	5.0	9.2
	185/65R14 86T	189	596	1168	530	44	5.5	9.2
	185/65R15 88T	189	621	1235	560	44	5.5	9.2
	195/65R15 91T	200	636	1356	615	44	6.0	9.2
	215/65R15 96T	221	661	1565	710	44	6.5	9.2
	215/65R15 96Q	221	661	1565	710	44	6.5	9.2
	215/65R16 98T	221	686	1653	750	44	6.5	9.2
	215/65R16 98Q	221	686	1653	750	44	6.5	9.2
	225/65R17 102Q	226	728	1874	850	44	6.5	9.2
	235/65R17 104Q	238	741	1984	900	44	7.0	9.2
70	175/70R14 84T	177	602	1102	500	44	5.0	9.2
	175/70R14 84Q	177	602	1102	500	44	5.0	9.2
	185/70R14 88T	189	616	1235	560	44	5.5	9.2
	195/70R14 91Q	189	616	1235	560	44	5.5	9.2
75	215/75R15 100S	216	705	1764	800	44	6.0	9.2

KR19

SERIES	SIZE		S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	
45	225/45R17 94H	XL	225	634	1477	670	51	7.5	9.2	
50	195/50R15 82H		198	578	1047	475	44	6.0	9.2	
55	185/55R15 82T		193	587	1047	475	44	6.0	9.2	
	195/55R15 85H		198	598	1135	515	44	6.0	9.2	
	195/55R16 91H	XL	198	622	1356	615	51	6.0	9.2	
	195/55R16 91T	XL	198	622	1356	615	51	6.0	9.2	
	205/55R16 91H		214	635	1356	615	44	6.5	9.2	
	215/55R16 93H		224	643	1433	560	44	7.0	9.2	
	225/55R16 95V		233	654	1521	690	44	7.0	9.2	
	185/60R14 82T		189	580	1047	475	44	5.5	9.2	
60	195/60R14 86T		201	590	1168	530	44	6.0	9.2	
	185/60R15 88T	XL	189	605	1235	560	44	5.5	9.2	
	195/60R15 88T		201	615	1235	560	44	6.0	9.2	
	205/60R15 91T		208	627	1356	615	44	6.0	9.2	
	215/60R16 95H		218	664	1521	690	44	6.5	9.2	
	225/60R16 98T		226	676	1521	690	44	6.5	9.2	
	155/65R13 73T		156	532	805	365	44	4.5	7.3	
	175/65R13 80T		177	561	992	450	44	5.0	9.2	
65	155/65R14 75T		156	557	853	387	44	4.5	7.3	
	165/65R14 79T		170	573	963	437	44	5.0	9.2	
	175/65R14 82T		177	585	1047	475	44	5.0	9.2	
	185/65R14 86T		189	598	1168	530	44	5.5	9.2	
	175/65R15 84H		177	612	1102	500	44	5.0	9.2	
	175/65R15 84T		177	612	1102	500	44	5.0	9.2	
	185/65R15 88T		189	622	1235	560	44	5.5	9.2	
	185/65R15 92T	XL	189	622	1389	630	51	5.5	9.2	
	195/65R15 91T		200	636	1356	615	44	6.0	9.2	
	205/65R15 94T		209	650	1477	670	44	6.0	9.2	
	215/65R16 98H		218	686	1653	750	44	6.5	9.2	
	70	155/70R13 75T		156	547	853	387	44	4.5	7.3
		165/70R13 79T		166	567	963	437	44	5.0	9.2
		175/70R13 82H		176	580	1047	475	44	5.0	9.2
165/70R14 81T			170	590	1019	462	44	5.0	9.2	
165/70R14 85T		XL	170	590	1135	515	51	5.0	9.2	
175/70R14 88T		XL	177	602	1235	560	51	5.0	9.2	
185/70R14 88T			189	616	1235	560	44	5.5	9.2	
195/70R15C 104/102R			198	655	1984/1874	900/850	65	6.0	9.7	
205/70R15 96S			209	669	1565	710	44	6.0	9.2	
215/70R15 98S			221	686	1653	750	44	6.5	9.2	

SPECIFICATIONS

KR15

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS/KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN
60	P235/60R14 96H	236	638	1565/710	44/300	7.0	9	
	P235/60R15 98H	236	663	1653/750	36/250	7.0	9	
	P235/60R16 100H	238	687	1764/800	44/300	7.0	9	
	P245/60R15 100H	243	675	1764/800	44/300	7.0	9	
65	P215/65R15 96H	218	663	1565/710	44/300	6.5	8.7	*
	P215/65R16 98H	218	686	1653/750	44/300	6.5	8.7	*
	P225/65R17 102T	228	722	1874/850	44/300	6.5	8.1	
	P235/65R17 103S	238	736	1929/875	44/300	7	9	*
	P235/65R17 104S	238	736	1984/900	44/300	7	9	
	P235/65R17 108T	238	736	2205/1000	51/350	7	9.4	
	P265/65R17 112S	267	776	2469/1120	44/300	8	9.4	
	P275/65R17 115S	277	790	2679/1215	44/300	8	9.4	*
	P275/65R17 115T	277	790	2679/1215	44/300	8	9.4	
	P285/65R17 115H	295	802	2756/1250	44/300	8.5	9.4	
	P285/65R17 116H	295	802	2756/1250	44/300	8.5	9.4	
	P265/65R18 115H	270	801	2601/1180	44/300	8	9.4	
	P265/65R18 116H	270	801	2601/1180	44/300	8	9.4	
	70	205/70R15 95S	208	670	1521/690	44/300	6.0	8.7
205/70R15 96S		208	670	1565/710	44/300	6.0	8.7	*
P215/70R15 98S		220	684	1653/750	44/300	6.5	8.7	*
P225/70R15 100S		227	698	1764/800	44/300	6.5	9	*
P235/70R15 103S		235	711	1929/875	44/300	7.0	9	*
P265/70R15 110S		266	753	2337/1060	44/300	8.0	9.4	*
P215/70R16 100S		220	708	1764/800	44/300	6.5	8.7	*
P225/70R16 102S		227	722	1874/850	44/300	6.5	9	*
P225/70R16 103S		224	722	1929/875	44/300	6.5	9	*
P235/70R16 106S		237	736	2094/950	44/300	7.0	9	*
P235/70R16 109S		237	736	2271/1030	51/350	7	9	
P245/70R16 107S		244	750	2150/975	44/300	7.0	9	*
P245/70R16 111T		244	750	2405/1090	51/350	7.0	9.4	
P255/70R16 109S		258	764	2271/1030	44/300	7.5	9.2	*
P265/70R16 112S	266	780	2469/1120	44/300	8.0	9.4		
75	P215/75R15 100S	216	703	1764/800	44/300	6	9.2	
	P225/75R15 102S	220	720	1874/850	44/300	6	9.7	
	P235/75R15 105S	233	734	2039/925	44/300	6.5	9.7	*
	P245/75R16 109S	243	774	2271/1030	44/300	7	9.7	

KR05

SERIES	SIZE	LOAD RANG	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
75	LT235/75R15 104/101Q OWL	C	232	736	1985/1820	900/825	50	6.5	11.2
	LT225/75R16 110/107N OWL	D	220	746	2335/2150	1060/975	65	6.0	11.2
	LT225/75R16 115/112N OWL	E	220	746	2680/2470	1215/1120	80	6.0	11.2
	LT245/75R16 120/116N	E	245	774	3085/2755	1400/1250	80	7.0	11.6
	LT265/75R16 119/116N OWL	D	267	800	3000/2755	1360/1250	65	7.5	12.1
	LT265/75R16 123/120N OWL	E	267	800	3415/3085	1550/1400	80	7.5	12.1
85	LT215/85R16 110/107N	D	216	772	2335/2150	1060/975	65	6.0	11.2
	LT215/85R16 115/112N OWL	E	216	772	2680/2470	1215/1120	80	6.0	11.2
	LT235/85R16 126/123Q	G	235	810	3750/3415	1700/1550	110	6.5	12.1
	LT235/85R16 120/116Q	E	235	810	3085/2755	1400/1250	80	6.5	12.1
30x9.5R15 LT 104Q OWL	C	242	748	1985	900	50	7.5	11.6	
30x9.5R15 LT 96Q OWL	B	242	748	1565	710	35	7.5	11.6	
31x10.5R15 LT 109Q OWL	C	268	775	2270	1030	35	8.5	12.1	

KR28

SERIES	SIZE	LOAD RANG	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN
65	P235/65R17 104S	SL	238	740	1984	900	44	7.0	10.2	
	P255/65R17 110S OWL	SL	260	766	2337	1060	44	7.5	10.5	
	P265/65R17 112S	SL	272	777	2469	1120	44	8.0	10.4	*
	P275/65R18 116S OWL	SL	279	815	2756	1250	44	8.0	10.5	
70	P235/70R16 106S OWL	SL	238	737	2094	950	44	7.0	10.2	*
	P245/70R16 106S OWL	SL	248	751	2094	950	44	7.0	10.2	*
	P245/70R16 107S OWL	SL	248	749	2149	975	44	7.0	10.2	
	P255/70R16 111S	SL	260	766	2403	1090	44	7.5	10.5	*
	P265/70R16 112S	SL	272	780	2469	1120	44	8.0	10.5	*
	P275/70R16 114T	SL	279	792	2601	1180	44	8.0	10.5	
	P245/70R17 111S	SL	248	777	2337	1060	44	7.0	10.2	*
	P265/70R17 115S	SL	272	804	2679	1215	44	8.0	10.5	
	P285/70R17 117S	SL	296	833	2833	1285	44	8.5	10.5	
75	P215/75R15 100S	SL	216	703	1764	800	44	6.0	9.7	
	P225/75R15 102S	SL	222	720	1874	850	44	6.0	9.7	*
	LT235/75R15 104/101Q OWL	C	235	733	1985/1820	900/825	50	6.5	12.4	*
	LT225/75R16 115/112Q OWL	E	223	746	2680/2470	1215/1120	80	6.0	11.8	*
	P245/75R16 111S	SL	242	775	2403	1090	44	7.0	10.2	*
	LT245/75R16 108/104Q OWL	C	245	775	2205/1984	1000/900	50	7.0	12.1	*
	LT245/75R16 120/116Q OWL	E	245	775	3086/2756	1400/1250	80	7.0	12.1	*
	P265/75R16 116S	SL	270	805	2756	1250	44	7.5	10.5	*
	LT265/75R16 123/120Q OWL	E	270	804	3417/3086	1550/1400	80	7.5	12.4	
LT265/75R16 112/109Q OWL	C	270	804	2469/2271	1120/1030	50	7.5	12.4		

KR28 (Continued)

SERIES	SIZE	LOAD RANG	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)	MADE IN TAIWAN
85	LT215/85R16 115/112Q OWL	E	216	773	2680/2470	1215/1120	80	6.0	11.8	*
	27*8.50R14LT 95Q	C	220	676	1521	690	50	7.0	11.8	*
	30*9.50R15LT 104Q OWL	C	240	750	1985	900	50	7.5	12.4	*
	31*10.50R15LT 109Q OWL	C	272	775	2270	1030	50	8.5	12.4	*

KR29

SERIES	SIZE	LOAD RANG	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
70	LT265/70R17 112/109Q OWL	C	272	804	2469/2271	1120/1030	50	8.0	14.7
	LT265/70R17 121/118Q OWL	E	272	804	3197/2910	1450/1320	80	8.0	14.7
75	LT235/75R15 104/101Q OWL	C	235	733	1985/1820	900/825	50	6.5	14.7
	LT225/75R16 110/107Q OWL	D	223	746	2335/2150	1060/975	65	6.0	14.7
	LT245/75R16 120/116Q OWL	E	250	776	3086/2756	1400/1250	80	7.0	14.7
	LT265/75R16 123/120Q OWL	E	270	806	3417/3086	1550/1400	80	7.5	14.7
	LT285/75R16 126/123Q OWL	E	290	834	3750/3415	1700/1550	80	8.0	14.7
	LT255/75R17 111/108Q OWL	C	255	814	2405/2205	1090/1000	50	7.0	14.7
85	LT235/85R16 120Q/116Q OWL	E	240	808	3086/2756	1400/1250	80	6.5	14.7
	31*10.5R15LT 109Q OWL	C	272	775	2270	1030	50	8.5	14.7
	32*11.5R15LT 113Q OWL	C	290	801	2535	1150	50	9.0	14.7

KR22

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
70	275/70R16 114T RWL	275	788	2601	1180	51	8.0	9.7

KR33

SERIES	SIZE				S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
	155R12C	8PR	88/86N	TL	157	550	1235/1168	560/530	65	4.5	7.7
	155R13C	8PR	91/89N	TL	157	578	1356/1278	615/580	65	4.5	7.7
	165R13C	8PR	94/93R	TL	167	596	1477/1433	670/650	65	4.5	7.7
	175R13C	8PR	97/95N	TL	178	606	1609/1521	730/690	65	5	7.9
	185R14C	8PR	102/100R	TL	188	650	1874/1764	850/800	54	5	8.8
	185R15C	8PR	103/102R	TL	188	674	1929/1874	875/850	65	5.5	8.8
	195R14C	8PR	106/104R	TL	198	666	2094/1984	950/900	450	5.5	8.8
	195R15C	8PR	106/104R	TL	196	693	2094/1984	950/900	65	5.5	8.8
70	165/70R13C	6PR	88/86Q	TL	170	562	1235/1168	560/530	54	5	7.7
	175/70R14C	6PR	95/93C		177	602	1521/1433	690/650	54	5	7.9
	195/70R15C	8PR	99/96S	TL	201	655	1708/1565	775/710	65	6	8.8
75	195/75R16C	8PR	102/99S	TL	196	698	2149/2039	975/925	65	5.5	8.8
80	195/80R15C		106/104R		196	693	2094/1984	950/900	65	5.5	8.8

KR33A

SERIES	SIZE				S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
65	205R14C	8PR	109/107Q	TL	208	686	2271/2149	1030/975	65	6	8.8
	215R14C		112/110Q		218	700	2469/2337	1120/1060	65	6	8.8
	215/65R16C	8PR	109/107T		221	686	2271/2149	1030/975	65	6.5	8.8
70	205/70R15		100 S	TL	209	669	1764	800	50	6	7.9
	215/70R15C	8PR	104/101R	TL	221	683	2094/1984	950/900	54	6.5	8.8
	225/70R15C	8PR	109/107Q	TL	228	697	2271/2149	1030/975	65	6.5	8.8
	225/70R15C		112/110S		228	697	2469/2337	1120/1060	65	6.5	8.8
	225/70R15C	8PR	106/103Q	TL	228	697	2271/2149	1030/975	65	6.5	8.8
75	205/75R14C	8P WSW	109/107R		203	664	2271/2149	1030/975	65	5.5	8.8
	205/75R15C	8P WSW	112/110R		203	689	2469/2337	1120/1060	65	5.5	8.8
	215/75R14C	8PR	104/101Q	TL	216	678	2464/2337	1120/1060	65	6	8.8
	215/75R16C	8PR	106/103Q	TL	216	728	2094/1929	950/875	65	6	8.8
	215/75R16C	10PR	113/111R	TL	216	728	2535/2403	1150/1090	65	6	8.8

KR06

SERIES	SIZE	LOAD RANG	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
	145R12C 81/79N	C	144	540	1019/963	462/437	51	4.0	8.1
	145R12C 86/84N	D	144	540	1168/1102	530/500	65	4.0	8.1
	145R12C 86/84R	D	144	540	1168/1102	530/500	65	4.0	8.1
	145R12C 95/93L	E	144	540	1520/1237	690/650	80	4.0	8.1
	155R12C 83/81N	C	158	552	1074/1019	487/462	51	4.5	8.4
	155R12C 88/86N	D	158	552	1235/1168	560/530	65	4.5	8.4
	155R12C 88/86R	D	158	552	1235/1168	560/530	65	4.5	8.4
	155R13C 91/89N	D	158	578	1356/1279	615/580	65	4.5	8.4
	155R13C 91/89R	D	158	578	1356/1279	615/580	65	4.5	8.4
	165R13C 94/92N	D	166	598	1477/1389	670/630	65	4.5	8.4
	165R13C 94/92R	D	166	598	1477/1389	670/630	65	4.5	8.4
	175R13C 97/95N	D	178	608	1609/1521	730/690	65	5.0	8.4
	175R13C 97/95R	D	178	608	1609/1521	730/690	65	5.0	8.4
	185R14C 99/97N	C	188	650	1709/1609	775/730	55	5.5	9.3
	185R14C 102/100N	D	188	650	1874/1764	850/800	65	5.5	9.3
	185R14C 102/100R	D	188	650	1874/1764	850/800	65	5.5	9.3
	195R14C 102/100N	C	198	668	1874/1764	850/800	55	5.5	9.3
	195R14C 106/104N	D	198	668	2094/1984	950/900	65	5.5	9.3
	195R14C 106/104R	D	198	668	2094/1984	950/900	65	5.5	9.3
	205R14C 105/103N	C	208	686	2039/1929	925/875	55	6.0	9.3
205R14C 109/107N	D	208	686	2270/2149	1030/975	65	6.0	9.3	
205R14C 109/107R	D	208	686	2270/2149	1030/975	65	6.0	9.3	
215R14C 112/110Q	D	218	701	2469/2337	1120/1060	65	6.0	9.3	
215R14C 112/110R	D	218	701	2469/2337	1120/1060	65	6.0	9.3	
195R15C 106/104R	D	198	693	2094/1984	950/900	65	5.5	9.3	
70	195/70R15C 100/98R	C	198	656	1764/1653	800/750	55	6.0	9.3
	195/70R15C 104/102R	D	198	656	1984/1874	900/850	65	6.0	9.3
	215/70R15C 109/107R	D	219	685	2270/2150	1030/975	65	6.5	9.3
	225/70R15C 109/107R	C	226	697	2271/2149	1030/975	55	6.5	9.9
	225/70R15C 112/110R	D	226	697	2469/2337	1120/1060	65	6.5	9.9
75	195/75R14C 102/100Q	C	196	648	1874/1764	850/800	55	5.5	9.3
	195/75R14C 102/100R	C	196	648	1874/1764	850/800	55	5.5	9.3
	195/75R14C 106/104Q	D	196	648	2094/1984	950/900	65	5.5	9.3
	195/75R14C 106/104R	D	196	648	2094/1984	950/900	65	5.5	9.3
	215/75R14C 112/110R	D	215	678	2469/2337	1120/1060	69	6.0	9.5
	195/75R16C 110/108Q	E	194	703	2336/2205	1060/1000	80	5.5	9.3
	195/75R16C 110/108N	E	194	703	2336/2205	1060/1000	80	5.5	9.3
	195/75R16C 110/108R	E	194	703	2336/2205	1060/1000	80	5.5	9.3
	205/75R16C 113/111N	E	203	714	2535/2403	1150/1090	77	6.0	9.3
	205/75R16C 113/111R	E	203	714	2535/2403	1150/1090	77	6.0	9.3

KR12

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
7.00R15 10P 111/109L	10PR	190	747	2403/2271	1090/ 1030	87	5.5	11.2
7.00R15 12P 114/112L	12PR	190	751	2601/2469	1180/ 1120	100	5.5	11.2
6.50R16 10P 108/107N	10PR	180	748	2205/2149	1000/ 975	83	5.5	10.7
6.50R16 12P 111/109N	12PR	180	748	2403/2271	1090/ 1030	97	5.5	10.7
7.00R16 10P 113/111N	10PR	190	772	2535/2403	1150/ 1090	87	5.5	11.2
7.00R16 12P 117/116N	12PR	190	776	2833/2756	1285/1250	100	5.5	11.2

KR18

SIZE	LOAD RANG	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
ST235/85R16	E	238	803	3640/3200	1650/1450	95	6.5	7.3
ST235/85R16	F	238	803	3960/3520	1800/1600	110	6.5	7.3

KR16

SERIES	SIZE	S.W. (MM)	O.D. (MM)	MAX. LOAD S/D (LBS)	MAX. LOAD S/D (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
50	195/50R13C 104/101N	195	525	1984/1819	900/825	95	6.0	5.8
60	185/60R12C 104/101N	186	526	1984/1819	900/825	95	5.5	5.8
70	155/70R12C 104/101N	158	523	1984/1819	900/825	95	4.5	5.8
	185/70R13C 90N	188	590	1323	600	44	5.5	5.8
	195/70R14C 96N	201	630	1565	710	54	6.0	5.8
	185R14C 104N	186	650	1984	900	73	6.0	5.8

KR03

SERIES	SIZE	PR	S.W. (MM)	O.D. (MM)	MAX. LOAD (LBS)	MAX. LOAD (KGS)	MAX. PSI	RIM (INCH)	TREAD DEPTH (MM)
75	ST205/75R14	4P	208	668	1430	650	35	5.5	8.0
	ST205/75R14	6P	208	668	1760	800	50	5.5	8.0
	ST205/75R14	8P	208	668	2040	925	65	5.5	8.0
	ST215/75R14	4P	216	680	1520	690	35	6.0	8.0
	ST215/75R14	6P	216	680	1870	850	50	6.0	8.0
	ST205/75R15	4P	208	693	1480	675	35	5.5	8.0
	ST205/75R15	6P	208	693	1820	825	50	5.5	8.0
	ST205/75R15	8P	208	693	2150	975	65	5.5	8.0
	ST225/75R15	4P	225	720	1760	800	35	6.0	8.0
	ST225/75R15	6P	225	720	2150	975	50	6.0	8.0
	ST225/75R15	8P	225	720	2540	1150	65	6.0	8.0
	ST225/75R15	10P	225	720	2830	1285	80	6.0	8.0
80	ST175/80R13	4P	179	612	1100	500	35	5.0	8.0
	ST175/80R13	6P	179	612	1360	615	50	5.0	8.0
	ST175/80R13	8P	179	612	1610	730	65	5.0	8.0
	ST235/80R16	8P	238	784	3000	1360	65	6.5	8.3
	ST235/80R16	10P	238	784	3500	1597	90	6.5	8.3

K368

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI	RIM (INCH)
6.00-14	8PR TT	167	670	1650/1562	60	4.5
6.50-14	8PR TT	180	702	1874/1764	60	4.5
6.50-14	10PR TT	180	702	2094/1984	77	4.5
6.50-16	10PR TT	180	750	2149/1929	77	5.5
7.00-15	10PR TT	194	744	2403/2271	71	5.5
7.00-16	12PR TT	198	775	2756/2601	91	5.5
7.00-16	12PR TT	198	775	2500/2370	90	5.5
7.50-16	10PR TT	210	802	2780/2440	75	6.0
7.50-16	10PR TT	210	802	2910/2756	77	6.0

K370

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI	RIM (INCH)
7-14.5LT	8PR TL	185	668	1870	70	6.0
7-14.5LT	10PR TL	185	668	2090	85	6.0
7-14.5LT	12PR TL	185	668	2335	100	6.0

K391M

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI	RIM (INCH)
4.50-12	6PR TT	127	542	783 / 739	44	3.0
4.50-12	8PR TT	127	542	908 / 882	58	3.0
5.00-12	8PR TT	141	566	1069 / 1025	58	3.5
5.00-12	10PR TT	141	566	1246 / 1190	75	3.5
7.00-15	6PR TL	198	748	1874 / 1764	46	5.5
7.00-15	8PR TL	198	748	2149 / 2039	60	5.5
7.00-15	10PR TL	198	748	2403 / 2271	71	5.5
7.00-16	8PR TL	198	775	1025 / 980	60	5.5
7.00-16	10PR TT	198	775	2535 / 2403	77	5.5
7.00-16	12PR TT	198	775	2756 / 2601	91	5.5
7.50-16	8PR TL	213	808	2601 / 2469	60	6.0
7.50-16LT	10PR TL	213	808	2910 / 2756	77	6.0
7.50-16LT	12PR TL	213	808	3197 / 2998	91	6.0
8-14.5LT	10PR TL	202	706	2540 / 2240	85	6.0
8-14.5LT	12PR TL	202	706	2835 / 2500	100	6.0
8-14.5LT	14PR TL	202	706	3070 / 2710	116	6.0

K392

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI	RIM (INCH)
6.00-14LT	6PR TT,TL	168	674	1433 / 1356	46	4.5
6.00-14LT	8PR TL	168	674	1653 / 1565	60	4.5
6.00-14LT	8PR TT,TL	168	674	1653 / 1565	60	4.5
6.50-14LT	6PR TT	180	696	1565 / 1521	46	5.0
6.50-14LT	8PR TT	180	696	1852 / 1795	60	5.0
6.50-14LT	8PR TT,TL	180	696	1874 / 1764	60	5.0
6.50-14LT	10PR TT	180	696	2094 / 1984	77	5.0
7.50-16LT	8PR TT	208	802	2590 / 2469	60	6.0
7.50-16LT	8PR TT	208	802	2601 / 2469	60	6.0
7.50-16LT	10PR TL	208	802	2780 / 2440	75	6.0
7.50-16LT	10PR TT	208	802	2910 / 2756	77	6.0

K393

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI	RIM (INCH)
6.50-14LT	6PR TT	180	700	1565 / 1521	46	5.0
6.50-14LT	8PR TT	180	696	1852 / 1795	60	5.0
6.50-14LT	8PR TT	180	696	1874 / 1764	60	5.0
6.50-16LT	8PR TT	180	754	2028 / 1918	60	5.5
6.50-16LT	8PR TT	180	754	2039 / 1929	60	5.5
6.50-16LT	10PR TT	180	754	2149 / 1929	77	4.5
6.50-16LT	12PR TT	180	754	2403 / 2271	80	4.5
7.00-16LT	8PR TT	201	769	2271 / 2149	60	5.5
7.00-16LT	10PR TT	201	769	2491 / 1918	70	5.5
7.00-16LT	10PR TT	201	769	2535 / 2403	77	5.5

K394

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI	RIM (INCH)
7.50-16LT	8PR TT	212	798	2590/2469	60	6.0
7.50-16LT	8PR TT	212	798	2601/2469	60	6.0
7.50-16LT	10PR TT	180	802	2780/2440	75	6.0

K396

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI	RIM (INCH)
7.50-16LT	8PR TT	210	805	2601/2469	60	6.0
7.50-16LT	8PR TT	210	805	2590/2469	60	6.0
7.50-16LT	10PR TT	212	805	2780/2440	75	6.0
7.50-16LT	10PR TT	212	805	2910/2756	77	6.0


K630

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI S/D (LBS)	RIM (INCH)
*4.50-12ULT	10PR TT	127	552	1102/1047	72	3.0
*5.00-16LT	10PR TT	143	670	1816	85	4.0
*6.50-14LT	8PR TT	180	705	1819/1609	60	5.5
*6.50-14LT	10PR TT	180	705	1984/1764	77	5.5
5.50-13LT	8PR TT	160	621	1235/1102	60	4.0
6.00-13LT	8PR TT	173	655	1433/1279	60	4.5
5.00-14ULT	6PR TT	137	619	1074	46	3.0
6.00-15LT	8PR TT	170	704	1609/1389	61	4.5
6.00-16LT	10PR TT	170	729	1874/1653	75	4.5
6.50-15	8PR TT	178	727	1819/1609	60	5.5
6.50-16	10PR TT	187	750	2160/1900	75	5.5
6.50-16	12PR TT	187	750	2400/2115	90	5.5
7.00-15	10PR TT	197	750	2320/2040	75	5.5
7.00-15	12PR TT	197	750	2580/2280	90	5.5
7.00-16	12PR TT	197	775	2700/2370	90	5.5
7.50-16	14PR TT	212	806	3330/3175	102	6.0
8.25-16	14PR TT	235	855	3759/3307	90	6.0
Truck Bus 9.00-20	16PR TT	255	1023	6217/5423	128/117	7.0
10.00-20	16PR TT	276	1058	6614/5798	117/107	7.5
11.00-20	16PR TT	290	1090	7209/6327	117/107	8.0

K631

SIZE	PLY RATING	S.W. (MM)	O.D. (MM)	MAX LOAD CAPACITY AT 60MPH/100KMH S/D (LBS)	MAX. PSI S/D (LBS)	RIM (INCH)
5.50-13LT	8PR TT	160	620	1235/1102	60	4.0
6.00-13LT	8PR TT	173	655	1433/1279	60	4.5
5.00-14ULT	6PR TT	139	618	1074	46	3.0
6.00-15LT	8PR TT	170	704	1609/1389	61	4.5
6.00-16LT	10PR TT	170	729	1874/1653	75	4.5
6.50-16LT	10PR TT	187	750	2160/1900	75	5.5
6.50-16LT	12PR TT	187	750	2400/2115	90	5.5
7.00-15LT	10PR TT	197	750	2320/2040	75	5.5
7.00-15LT	12PR TT	197	750	2580/2280	90	5.5
7.00-16LT	12PR TT	197	775	2700/2370	90	5.5
7.50-16LT	14PR TT	212	806	3330/3175	102	6.0
8.25-16LT	14PR TT	235	855	3759/3307	90	6.0
Truck Bus 9.00-20	16PR TT	260	1030	6217/5423	128/117	7.0
10.00-20	16PR TT	276	1058	6614/5798	117/107	7.5

Sidewall Graphic

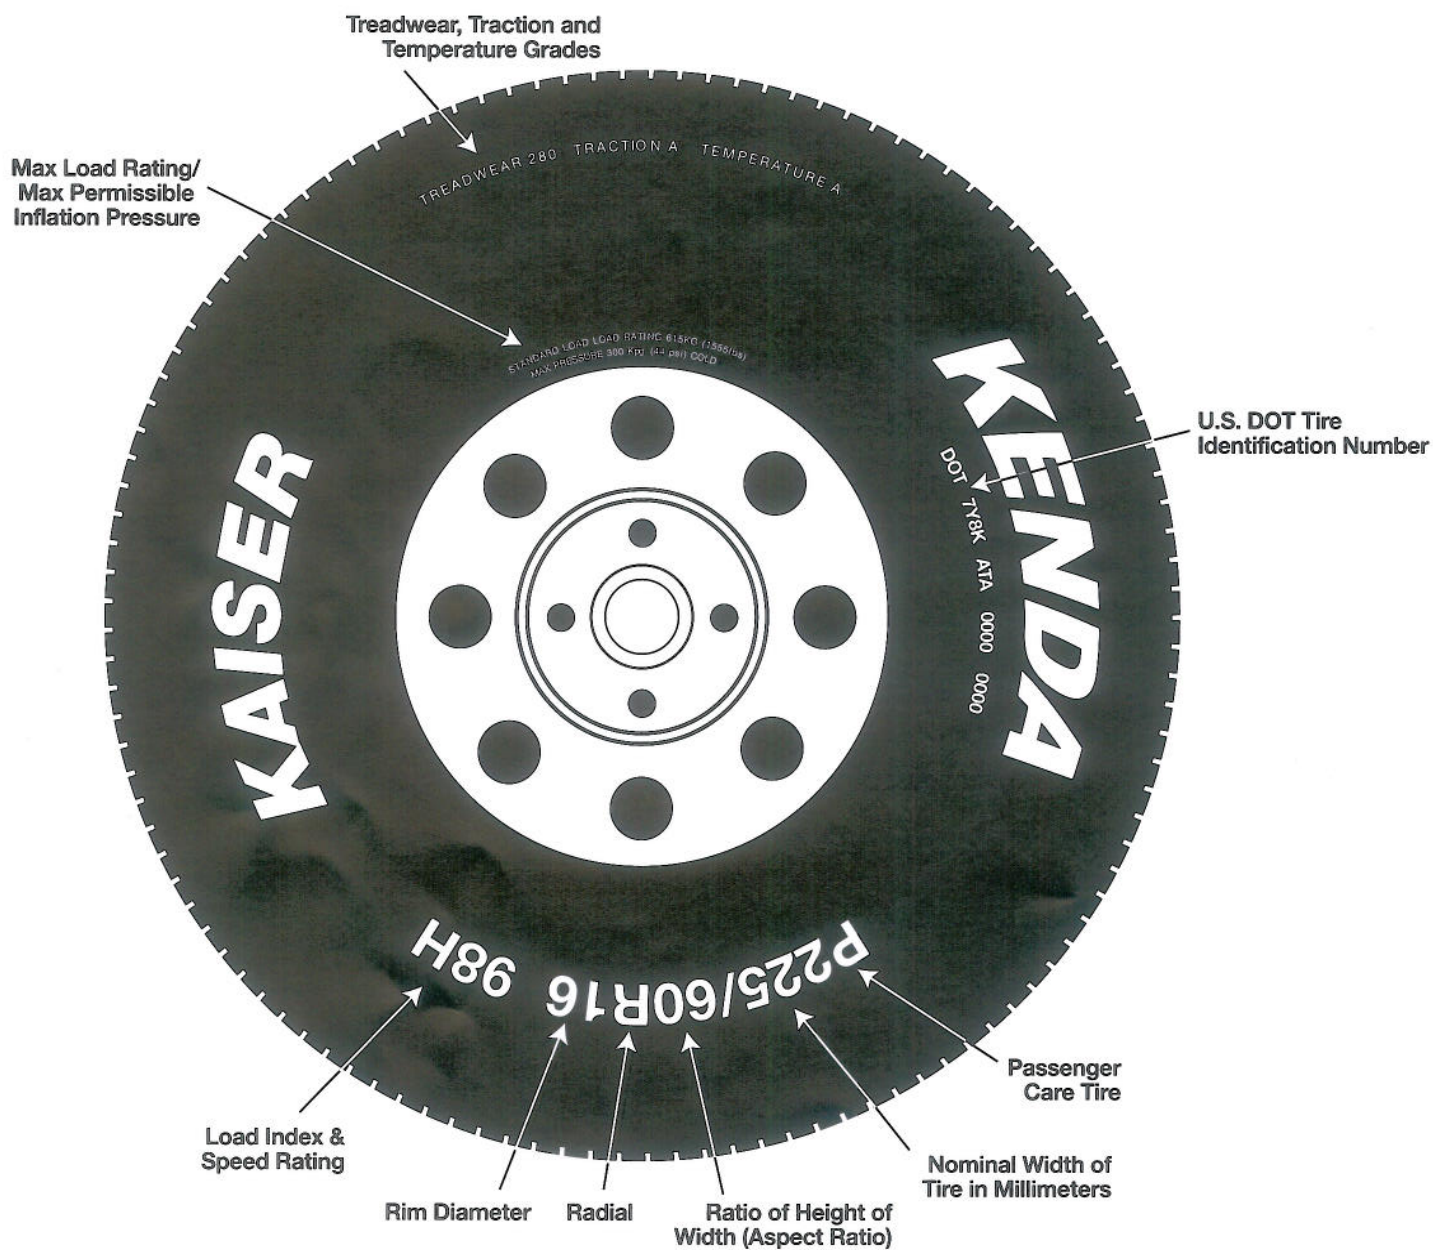

Load Rating Index

The load index on a passenger car tire is a numerical code stipulating the load-carrying capacity of a tire, or how much weight a tire can support. For example, if a tire has a load index of 89, it can support 1,279 pounds (from below chart) at maximum air pressure.

Load Index	Load (lbs)	Load (kgs)	Load Index	Load (lbs)	Load (kgs)	Load Index	Load (lbs)	Load (kgs)	Load Index	Load (lbs)	Load (kgs)	Load Index	Load (lbs)	Load (kgs)
0	99	45	30	234	106	60	551	250	90	1323	600	120	3086	1400
1	102	46	31	240	109	61	567	257	91	1356	615	121	3197	1450
2	105	48	32	247	112	62	584	265	92	1389	630	122	3307	1500
3	107	49	33	254	115	63	600	272	93	1433	650	123	3417	1550
4	110	50	34	260	118	64	617	280	94	1477	670	124	3527	1600
5	114	52	35	267	121	65	639	290	95	1521	690	125	3638	1650
6	117	53	36	276	125	66	639	290	96	1565	710	126	3748	1700
7	120	54	37	282	128	67	677	307	97	1609	730	127	3858	1750
8	123	56	38	291	132	68	694	315	98	1653	750	128	3968	1800
9	128	58	39	300	136	69	716	325	99	1709	775	129	4079	1850
10	132	60	40	309	140	70	739	335	100	1764	800	130	4189	1900
11	136	62	41	320	145	71	761	345	101	1819	825	131	4289	1945
12	139	63	42	331	150	72	783	355	102	1874	850	132	4409	2000
13	143	65	43	342	155	73	805	365	103	1929	875	133	4541	2060
14	148	67	44	353	160	74	827	375	104	1984	900	134	4674	2120
15	152	69	45	364	165	75	852	386	105	2039	925	135	4806	2180
16	157	71	46	375	170	76	882	400	106	2094	950	136	4938	2240
17	161	73	47	386	175	77	908	412	107	2149	975	137	5071	2300
18	165	75	48	397	180	78	937	425	108	2205	1000	138	5203	2360
19	171	78	49	408	185	79	963	437	109	2271	1030	139	5357	2430
20	176	80	50	419	190	80	992	450	110	2337	1060	140	5512	2500
21	182	83	51	430	195	81	1019	462	111	2403	1090	141	5677	2575
22	187	85	52	441	200	82	1047	475	112	2469	1120	142	5842	2650
23	193	88	53	454	206	83	1074	487	113	2535	1150	143	6008	2725
24	198	90	54	467	212	84	1102	500	114	2601	1180	144	6173	2800
25	204	93	55	481	218	85	1135	515	115	2679	1215	145	6393	2900
26	209	95	56	494	224	86	1168	530	116	2756	1250	146	6614	3000
27	215	98	57	507	230	87	1201	545	117	2833	1285	147	6779	3075
28	220	100	58	520	236	88	1235	560	118	2910	1320	148	6844	3104
29	227	103	59	536	243	89	1279	580	119	2998	1360	149	7165	3250
												150	7385	3350

Tire Speed Rating

The speed rating of a tire indicates the speed category (or range of speeds) at which the tire can carry a load under specified service conditions. The speed rating system shown below displays the top speed for which a tire is certified. The system does not reflect the total performance capacity of a tire. A letter from A to Z symbolizes a tire's certified speed rating, ranging from 5 km/h (3mph) to above 300 km/h (186 mph). This information will not be found on all tires.

Speed Rating Chart

Speed Rating	Speed (km/h)	Speed (mph)	Speed Rating	Speed (km/h)	Speed (mph)	Speed Rating	Speed (km/h)	Speed (mph)
A1	5	3	D	65	40	Q	160	99
A2	10	6	E	70	43	R	170	106
A3	15	9	F	80	50	S	180	112
A4	20	12	G	90	56	T	190	118
A5	25	16	J	100	62	U	200	124
A6	30	19	K	110	68	H	210	130
A7	35	22	L	120	75	V	240	149
A8	40	25	M	130	81	W	270	168
B	50	31	N	140	87	Y	300	186
C	60	37	P	150	93	ZR	Over 240	Over 150

Light Truck-Load Range Letter

Load Range	Ply Rating
B	4
C	6
D	8
E	10
F	12

Light Truck Load Range

The Load Range Letter on light truck tires indicates their ply rating.

ST-Metric-Load Range Letter

Load Range	Ply Rating
B	4
C	6
D	8
E	10

Light Truck-Metric Tires

LT-Metric tires are branded with their load range (Load Range E) or their ply rating (10 Ply Rated) on their sidewalls.